

Hubbell Twist-Lock® Devices
30A, 277V AC, 2 Pole, 3 Wire Grounding
Insulgrip® Plug

Features

- Superior cord grip design protects terminations from excess strain.
- Clear, funnel shaped wire entry for ease of termination.
- Integral dust shield protects wiring chamber from dust or contaminants.

Ordering Information

Description	Cord Diameter	Hubbell Number
Black and white nylon.	.360" - .930" (9 - 24 mm)	HBL2631

Stay Online Item # 4384

Listings

Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Housing / Cord Clamp	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#10-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - nickel plated

Performance

Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielect Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#16 AWG - #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)

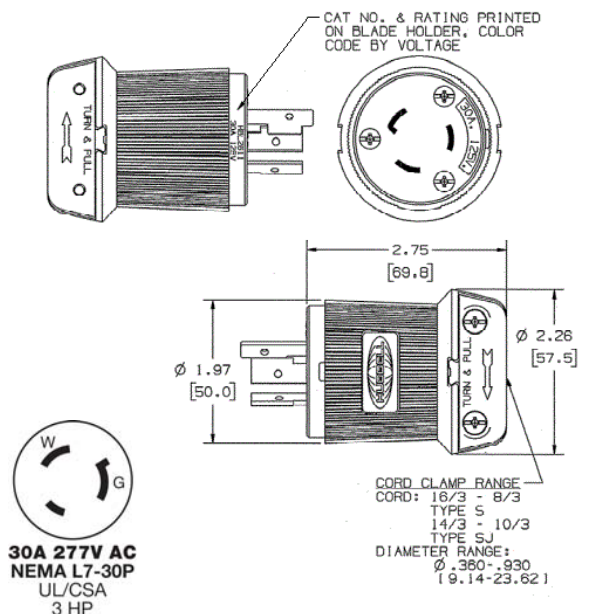

Complementary Products

Connector	HBL2633
Single Receptacle	HBL2630
Flanged Receptacle	HBL2636
Weatherproof Boot	HBL6031