




WESTCAR
MILANO - ITALY

ROTOFLUID COUPLING ALFA
"K-LRV" "SCF K-LRV" "DCF KLRV"

Sheet
45-042B EN

Date
05-2006

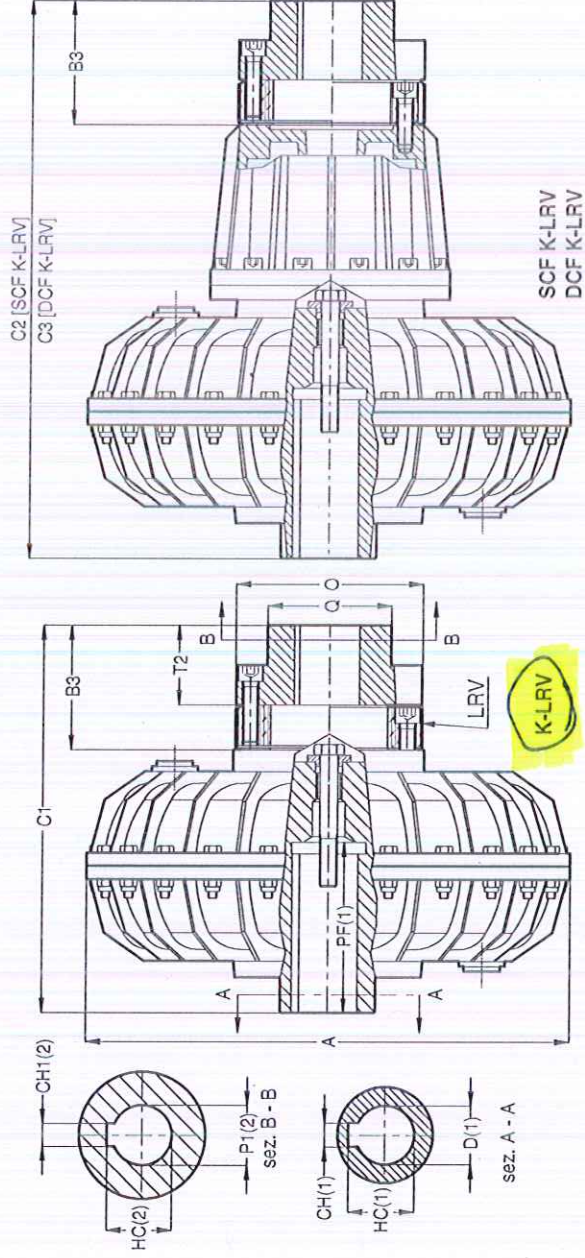

NOTE: (1) FOR BORE AND KEYWAY DIMENSIONS SEE SHEET 10-019D
(2) UPON REQUEST: BORE P1 MACHINED SEE SHEET 10-023A

Size.	K-LRV										SCF K-LRV			DCF K-LRV				
	Type	D	A	B3	C1	O	P1 Max.	Q	T2	Weight Kg.	Dimensions mm	Type	C2	Weight Kg.	Dimensions mm	Type	C3	Weight Kg.
10	K-1-LRV-1	14-19-24	193	50	164	84	28	45	30	4,7	-	-	-	-	-	-	-	-
	K-3-LRV-1	28																
20	K-1-LRV-2	19-24-28	230	69	204	104	38	56	45	7,6	-	-	-	-	-	-	-	-
	K-3-LRV-2	38																
30	K-01-LRV-3	28-38-42	290	87	277	130	48	68	55	16,2	SCF K-02-LRV-3	304	18,6	DCF K-02-LRV-3	344	19,2		
	K-03-LRV-3	48 **								16,2	SCF K-03-LRV-3	332	18,6	DCF K-03-LRV-3	372	19,2		
	K-04-LRV-3	55	306							17,2	SCF K-04-LRV-3	361	19,6	DCF K-04-LRV-3	401	20,2		
30P	K-01-LRV-3	28-38-42	249							24	SCF K-02-LRV-3	304	26,4	DCF K-02-LRV-3	344	27		
	K-03-LRV-3	48 **	327	87	277	130	48	68	55	24	SCF K-03-LRV-3	332	26,4	DCF K-03-LRV-3	372	27		
	K-04-LRV-3	55	306							25	SCF K-04-LRV-3	361	27,4	DCF K-04-LRV-3	401	28		
40P	K-01-LRV-4	38-42-48-55	338	96	294	158	60	91	60	27,2	SCF K-02-LRV-4	352	30,9	DCF K-02-LRV-4	424	32,4		
	K-02-LRV-4	60									SCF K-02-LRV-4	369	43,4	DCF K-02-LRV-4	444	45,6		
50	K-02-LRV-5	42-48-55-60-65	430	110	289	176	70	106	70	37,6	SCF K-02-LRV-5	369	43,4	DCF K-02-LRV-5	444	45,6		
	K-02-LRV-5	65									SCF K-02-LRV-5	401	53,4	DCF K-02-LRV-5	476	55,6		
55	K-03-LRV-5	42-48-55-60-65	430	110	320	176	70	106	70	47,6	SCF K-03-LRV-5	400	53,4	DCF K-03-LRV-5	475	55,6		
	K-03-LRV-5	75									SCF K-03-LRV-5	406	65,3	DCF K-03-LRV-5	466	69,7		
60	K-02-LRV-6	48-55-60-65-75	520	124	316	195	80	121	80	59	SCF K-02-LRV-6	406	65,3	DCF K-02-LRV-6	466	69,7		
	K-03-LRV-6	80	346								SCF K-03-LRV-6	436	85,3	DCF K-03-LRV-6	516	59,7		
65	K-02-LRV-6	55-60-65-75-80	520	124	364	195	80	121	80	76,9	SCF K-02-LRV-6	454	85,3	DCF K-02-LRV-6	534	89,7		
	K-2N-LRV-7	65-75-80-90	380								SCF K-2N-LRV-7	490	117,3	DCF K-2N-LRV-7	605	124,3		
70P	K-3N-LRV-7	100	640	140	420	236	100	146	90	104,3	SCF K-3N-LRV-7	530	117,3	DCF K-3N-LRV-7	645	124,3		
75P			See type "K-FRV"										See type "SCF K-FRV"			See type "DCF K-FRV"		
80P																		
85P																		
90P																		
95P																		

Available with flexible coupling ROTOPIN AB - See type "K-AB"

* Weight with oil - ** Reduced keyway - Standard bores in heavy type