

SPECIFICATIONS

	AP-2500	AP-2500BY	AP-3000
TEST SPECIFICATIONS			
Maximum temporal range (degrees)	160° with moving fixation point	160° with moving fixation point	160° with moving fixation point
Stimulus duration	0.1 to 9.9 sec	0.1 to 9.9 sec	0.1 to 9.9 sec
Visual field testing distance	30 cm	30 cm	30 cm
Background illumination (LED)	3.2 cd/m ² (green)	3.2 cd/m ² (green), 100 cd/m ² (blue)	3.2 cd/m ² (green, red), 10 cd/m ² (white), 100 cd/m ² (blue)
SPECIAL FEATURES			
Electrically controlled chin rest (x/y)	■	■	■
Magnetic chin and forehead rest	■	■	■
TEST LIBRARY			
Kinetic testing			Auto kinetic
Custom testing	Test editor	Test editor	Test editor
Threshold and screening test	■	■	■
FIXATION CONTROL			
Heijl Krakau blind spot monitor	■	■	■
Video eye monitor	■	■	■
Gaze / head tracking	■	■	■
Vertex monitoring	■	■	■
STIMULUS			
White-on-white			■
Red- or blue-on-white			■
Blue-on-yellow		■	■
GENERAL TESTING FEATURES			
Stimulus sizes	III	III and V (blue)	I to V
Foveal threshold testing	■	■	■
Automatic pupil measurement	■	■	■
SOFTWARE FEATURES			
Regression analysis	■	■	■
Glaucoma Hemifield test	■	■	■
Serial field overview	■	■	■
Networking	■	■	■
DICOM connectivity	■	■	■
Multilingual user interface	■	■	■
DATA STORAGE, RETRIEVAL AND ANALYSIS			
Hard drive	External	External	Internal
USB	■	■	■
CD-R/W drive	External	External	External
Printer	Compatible with Windows	Compatible with Windows	Compatible with Windows
User defined test storage	■	■	■
DIMENSIONS			
Height	566 mm	566 mm	566 mm
Width	633 mm	633 mm	633 mm
Depth	396 mm	396 mm	396 mm
Weight	20 kg	20 kg	23 kg
ELECTRICAL REQUIREMENTS			
Input	115 to 230 V	115 to 230 V	115 to 230 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Power consumption	< 95 VA	< 95 VA	< 95 VA

2013/09 - subject to change without notice

TOMEY PERIMETER SERIES

COMPACT PERIMETER

DELIGHT IN SIGHT

Ultimate precision and comfort.
Easy to use.



- Fixation control: digital eye tracking and Heijl-Krakau
- Full field perimetry (160°)
- Individual / customisable
- Standardised exams, analyse and documentation
- Adaptive to patient's conditions
- EU driving licence test conformity

TOMEY
TECHNOLOGY AND VISION



TOMEY EUROPE
TOMEY GmbH
Am Weichselgarten 19a
91058 Erlangen, Germany
Phone +49 9131 777 10
Fax +49 9131 777 1 20
Email info@tomey.de

TOMEY ASIA-PACIFIC
TOMEY CORPORATION JAPAN
2-11-33 Noritakeshinmachi
Nishi-ku, Nagoya 451-0051, Japan
Phone +81 52 581 5327
Fax +81 52 561 4735
Email intl@tomey.co.jp

TOMEY
TECHNOLOGY AND VISION
www.tomey.de

THE TOMEY PERIMETER SERIES




QUALITY IN DETAIL

From static to kinetic perimetry – choose your perimeter model according to your workflow. An easy-to-use software is common in all models. Monitoring of patients is as simple as 1-2-3. The “Last exam” function offers you the option to repeat the previous exam with the same settings of test and strategy for a given patient. You will save time and you can compare results.


Whether you prefer a standard test or individual settings, everything is possible with our AP series.

SIMPLE MENU

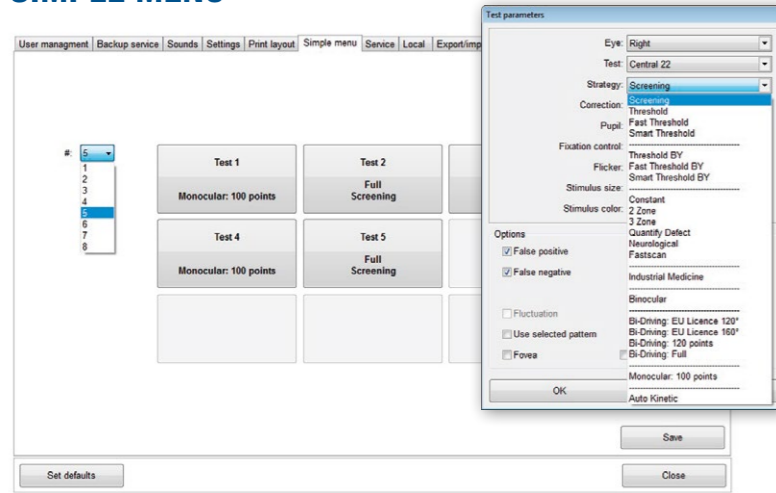


The simple menu option makes the usability of the perimeter software very smooth. The innumerable applications, available in the **Tomey AP's**, can be configured individually up to operator's needs.

EU DRIVING LICENCE

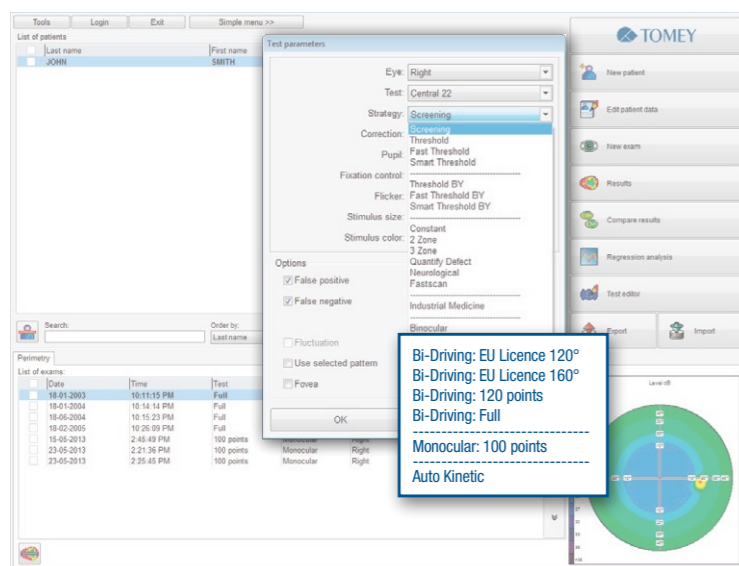


According to directive 2009 / 113 / EC of 25th August 2009 the Tomey perimeters fulfil the latest requirements for EU driving licences testing. All necessary tests are available in order to verify the conditions of physical and mental fitness of drivers.

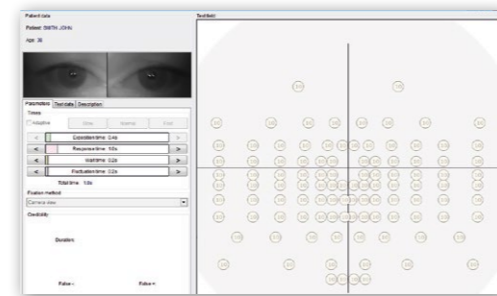

Binocular driving test 120 points

AUTO KINETIC (AP-3000)

Kinetic test results are presented as Isopters, each one in a different colour.

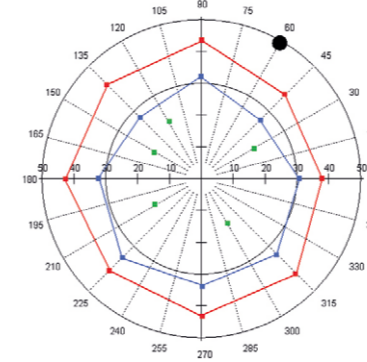

MONOCULAR & BINOCULAR TESTING

In order to position the patient's head correctly, magnetic forehead and chin rest supports allow monocular and binocular testing. Therefore, different types of magnetic forehead supports and chin rests are supplied with Tomey perimeters.



DICOM

In addition to individual print out form and data export functions, the perimeter software offers DICOM data export. With DICOM the interoperability between different medical applications is guaranteed.

DATA IMPORT


It is possible to import data from a third party (for example Humphrey®). Tomey AP software can read external data formats such as pdf, jpg, xls or doc.

BY – BLUE ON YELLOW


With blue-on-yellow tests, available in **AP-2500BY** and **AP-3000**, it is possible to detect glaucoma in a very early stage.



PRINT LAYOUT OPTIONS

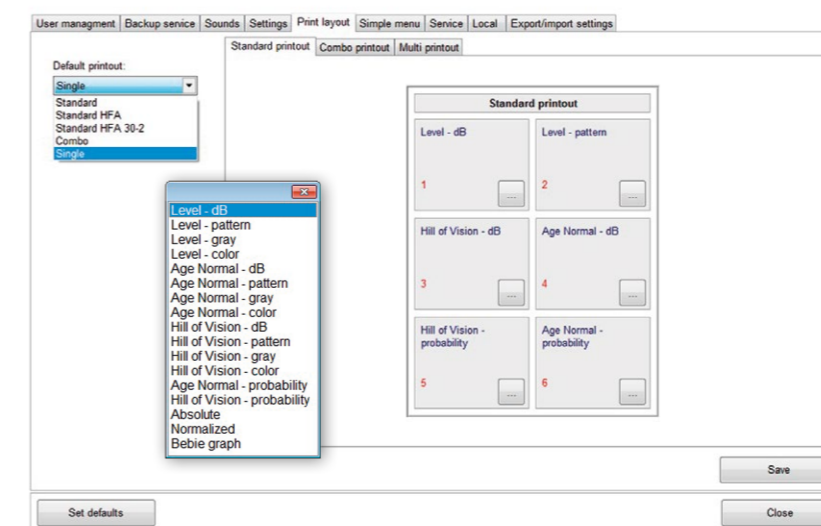

Not only the test procedures but also the print out form can be customised or used in a standardised way. Furthermore the systems offer flexible data export, e.g. pdf.

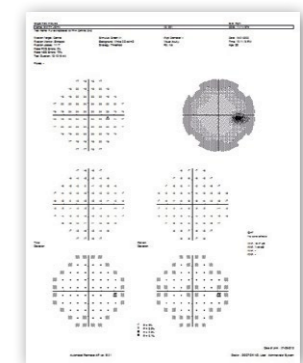

print out sample