

Luxtronic®

Geräte der Beleuchtungselektronik



**NLE
00.60**


**2 x 36 W
230 V AC**

Technical data

Lamp type	36 W T8 ¹⁾
Lamp start	Warm start in mains mode $t < 1.5 \text{ s}$ ²⁾
Mains supply	220 - 240 V, 50 - 60 Hz
Mains current @ 230 V	0.32 A
Power factor	0.98
Mains supply voltage range	198 to 264 V
Ambient temperature t_a	-20 to +60 °C
Temperature protection	110 °C acc. EN 61347-1 C.6 e)
EOL Test circuit	acc. EN 61347-2-3 17.2 und .3
Certification	ENEC 05
Emergency lighting acc. VDE0108	suitable
Wire cross-section	0.5 to 1.5 mm ²
Battery	5 x 1.2V NiCd, 4 Ah
Discharge time	1,5 h
BLF in battery mode	12 %
Charge time	24 h ^{3) 4) 5)}
Order number	3 E 236 03 0

Dimensions

Length L	250 mm
Width B	65 mm
Height H	32 mm
hole spacing D	240 mm

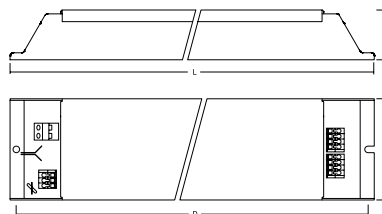

Remarks:

- 1) Lamps switchable through L' in mains mode
- 2) Instant start in emergency mode
- 3) Status indicator through green LED with 1100mm wire length
- 4) Battery basic isolation to L/N, battery minus = functional earth
- 5) Normal function acc. EN 61347-2-7 22.3